



Standard	NS 2785
Nominal voltage	220.0 V
Power consumption	Max. 55 W
Luminous intensity	> 35 cd
Lifetime	Minimum 1500 hours
Diameter max.	39 mm
Length max.	110 mm
Light center length	64 ± 1 mm
Cap	B22d, Brass
Glass color	Clear
Numbers per box	50 pieces

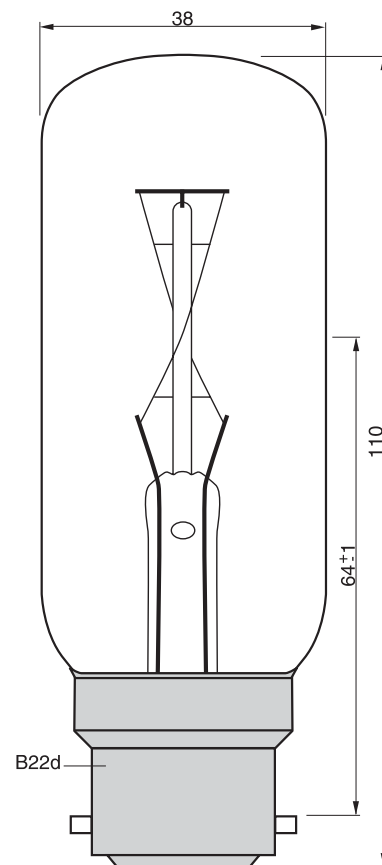

Candlepower light distribution

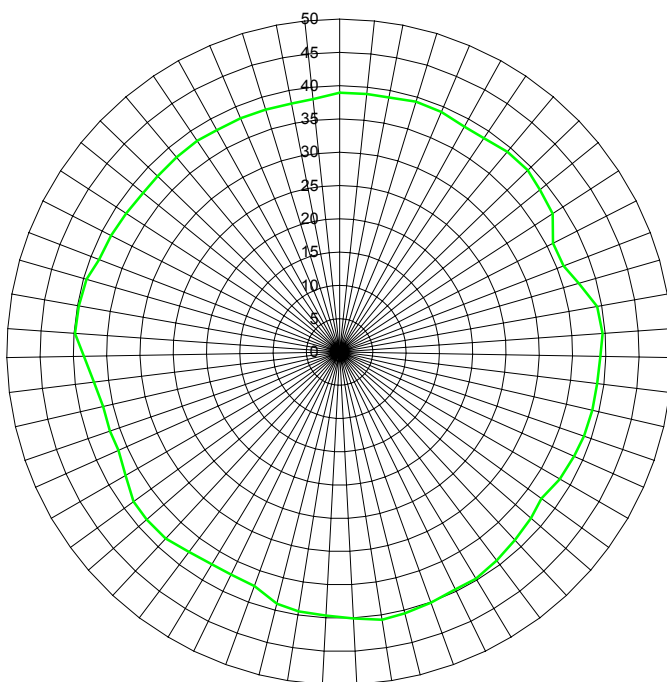

Date: 08.03.02
 SM number: 10055
 Type: 230V 35cd
 Voltage: 220.0 [V]
 Current: 238 [mA]
 Power: 52.4 [W]
 Responsible: Jan Vesterlund

Curve 1: Horizontal 0°



danlamp®

SM no. 10055

SM Navigation 220V 35cd B22d

8. March 2002