



MASTER TL5 High Efficiency

MASTER TL5 HE 35W/827 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	G5 [G5]		
Life to 50% Failures Preheat (Nom)	24000 h		
Features	na [Not Applicable]		
System Description	High Efficiency		
LSF Preheat 2000 h Rated	99 %		
LSF Preheat 4000 h Rated	99 %		
LSF Preheat 6000 h Rated	99 %		
LSF Preheat 8000 h Rated	99 %		
LSF Preheat 16000 h Rated	97 %		
LSF Preheat 20000 h Rated	84 %		
Light Technical			
Color Code	827 [CCT of 2700K]		
Luminous Flux (Nom)	3650 lm		
Luminous Flux (Rated) (Nom) 3325 lm			

Color Designation	Incandescent White		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	104 lm/W		
Correlated Color Temperature (Nom)	2700 K		
Luminous Efficacy (rated) (Nom)	94 lm/W		
Color Rendering Index (Max)	85		
Color Rendering Index (Min)	80		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	96 %		
LLMF 4000 h Rated	95 %		
LLMF 6000 h Rated	94 %		
LLMF 8000 h Rated	93 %		
LLMF 12000 h Rated	92 %		
LLMF 16000 h Rated	91 %		
LLMF 20000 h Rated	90 %		

Datasheet, 2020, June 8 data subject to change

MASTER TL5 High Efficiency

Operating and Electrical				
Power (Nom)	35.5 W			
Lamp Current (Nom)	0.175 A			
Temperature				
Design Temperature (Nom)	35 ℃			
Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Cap-Base Information	Green Plate			
Approval and Application				
Energy Efficiency Label (EEL)	A+			


Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	38 kWh			
Product Data				
Full product code	871150064324755			
Order product name	MASTER TL5 HE 35W/827 SLV/40			
EAN/UPC - Product	8711500643247			
Order code	927927082755			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	40			
Material Nr. (12NC)	927927082755			
Net Weight (Piece)	127.400 g			
ILCOS Code	FDH-35/27/1B-L/P-G5-16/1450			


Dimensional drawing


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm
35W/827 SLV/40					

TL5 35W/827/GP HE

Photometric data






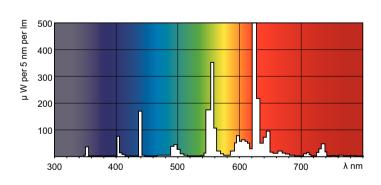


LDPO_TL5-HE8_827-Spectral power distribution Colour

MASTER TL5 High Efficiency

Lifetime

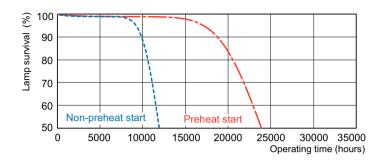



LDLE_TL5-HE8_0001-Life expectancy diagram

LDLE_TL5-HE8_0002-Life expectancy diagram



LDLM_TL5-HE8_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.