



MASTER LED tube InstantFit HF T5



MAS LEDtube HF 1500mm HO 26W 830 T5 OE

MASTER, LEDtube, T5, HF, 1500 mm, 26 W, 49W TL5 HO, 3000 K, 3700 lm, CRI 80, 60000 hour(s)

MASTER, LEDtube, T5, HF, 1500 mm, 26 W, LED alternative to 49W TL5 HO, 3000 K, 3700 lm, CRI 80, 60000 hour(s), 142.00 lm/W, EEL E, G5, Beam angle 200 degree(s), Glass, 1500 mm, RG0, SDCM 6, PF 0.92, IP20

Product data

General Information	
Cap-Base	G5
Nominal lifetime	60,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Warranty period	5 years
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	200 degree(s)
Luminous Flux	3,700 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	142.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	20K to 140K Hz
Input Frequency	20K to 140K Hz
Power Consumption	26 W
Lamp Current (Max)	420 mA
Lamp Current (Min)	150 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.92
Voltage (Nom)	60-120 V
LED alternative to fluorescent lamp power	49W TL5 HO
Inrush current at mains	-
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-

MASTER LED tube InstantFit HF T5

Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	-
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	HF

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes - Check ballast compatibility
----------	-----------------------------------

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T5
Net Weight (Piece)	0.196 kg

Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes

Approval Marks	RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	1384143
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-20 °C to 45 °C


Application Conditions

Wireless Technology	Not applicable
---------------------	----------------

Product Data

Order product name	MAS LEDtube HF 1500mm HO 26W 830 T5 OE
Full product name	MAS LEDtube HF 1500mm HO 26W 830 T5 OE
Full product code	871869974957600
Order code	929002352302
Material Nr. (12NC)	929002352302
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699749576
Numerator - Packs per outer box	10
EAN/UPC - Case	8718699749583


Dimensional drawing

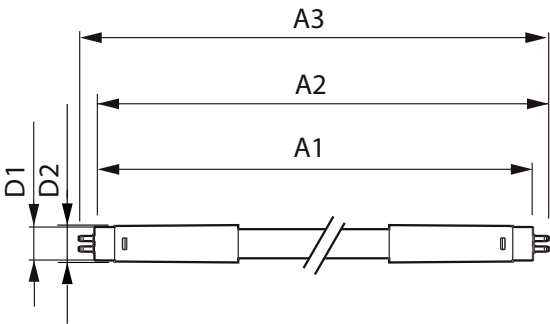


Product	D1	D2	A1	A2	A3
MAS LEDtube HF 1500mm HO 26W 830 T5 OE	15.5 mm	19 mm	1,449 mm	1,456 mm	1,463 mm

MASTER LED tube InstantFit HF T5


Photometric data

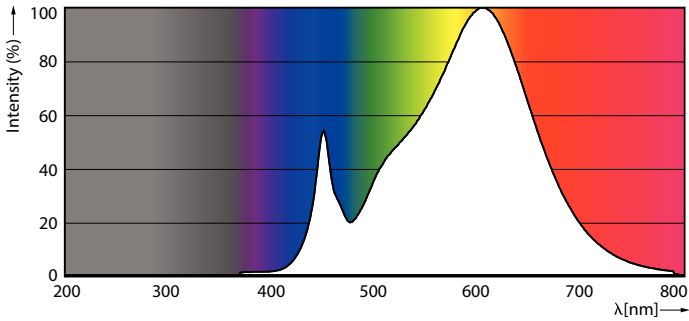

Spectral Power Distribution Colour - MAS LEDtube HF 1500mm HO 26W 830 T5 OE




General uniform lighting - MAS LEDtube HF 1500mm HO 26W 830 T5 OE




Light Distribution Diagram - MAS LEDtube HF 1500mm HO 26W 830 T5 OE

Lifetime

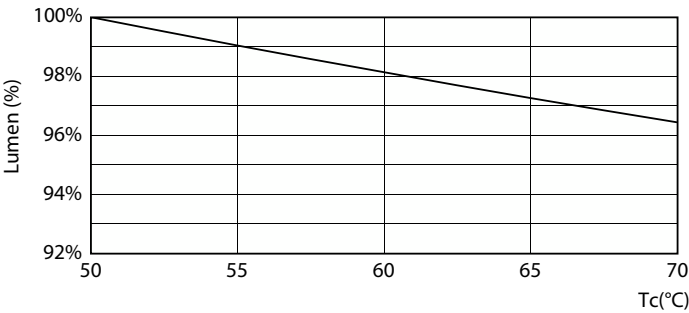


Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HO 26W 830 T5 OE

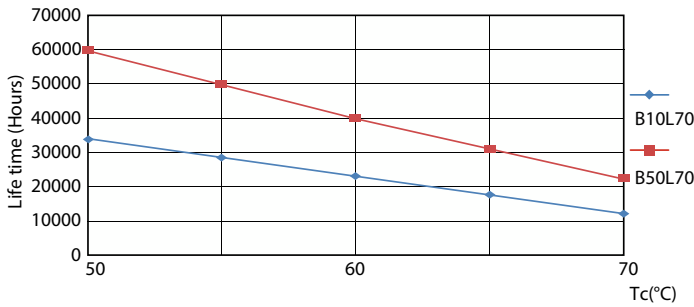


LEDtube 60K 5070 LifetimeVsTc-LED

MASTER LED tube InstantFit HF T5


Lifetime

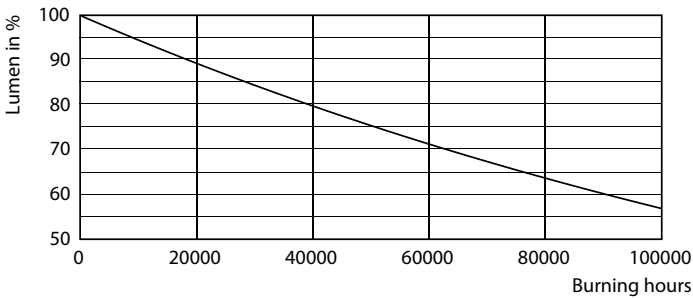

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HO 26W 830 T5 OE

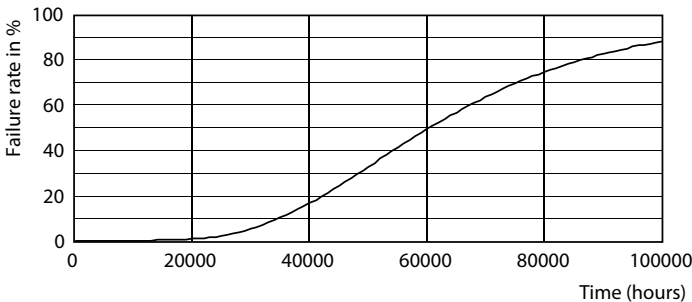

Life Expectancy Diagram

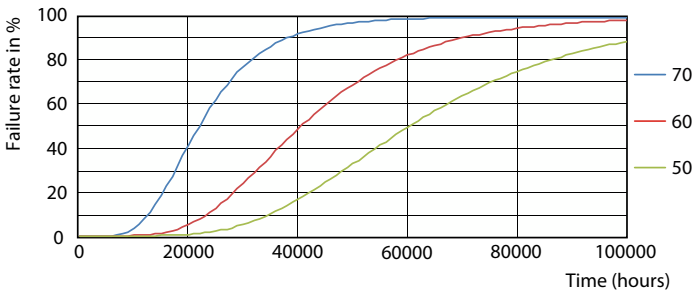

LEDtube 60K 5070 FailureRate-LED

