

MASTER Value LED tube EM/Mains T8



MAS LEDtube VLE 1200mm UO 15.5W 865 T8

MASTER Value, LEDtube, T8, EM/Mains, 1200 mm, 220–240 V, 15.5 W, 36W TL-D, 6500 K, 2500 lm, CRI 80, 60000 hour(s)

MASTER Value, LEDtube, T8, EM/Mains, 1200 mm, 220–240 V, 15.5 W, LED alternative to 36W TL-D, 6500 K, 2500 lm, CRI 80, 60000 hour(s), 161 lm/W, EEL C, G13, Beam angle 190 degree(s), Glass, 1200 mm, RG0, SDCM 6, PF 0.9, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	G13
Nominal lifetime	60,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	190 degree(s)
Luminous Flux	2,500 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	161 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	15.5 W
Lamp Current (Max)	73 mA
Lamp Current (Min)	67 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220–240 V
LED alternative to fluorescent lamp power	36W TL-D
Inrush current at mains	8.2
Max. lamp no. on MCB B type 10A – Mains	90
Max. lamp no. on MCB B type 10A – EM ballast	95
without Compensation Capacitor.	

MASTER Value LED tube EM/Mains T8

Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	15
Max. lamp no. on MCB B type 16A – Mains	145
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	150
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	25
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	60 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8
Net Weight (Piece)	0.215 kg

Approval and Application

Energy Efficiency Class	C
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate

Energy Consumption kWh/1000 h	16 kWh
EPREL Registration Number	1095873
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 45 °C


Application Conditions

Wireless Technology	Not applicable
---------------------	----------------

Product Data

Order product name	MAS LEDtube VLE 1200mm UO 15.5W 865 T8
Full product name	MAS LEDtube VLE 1200mm UO 15.5W 865 T8
Full product code	871951431684300
Order code	929002997802
Material Nr. (12NC)	929002997802
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8719514316843
Numerator – Packs per outer box	10
EAN/UPC – Case	8719514316850


Dimensional drawing

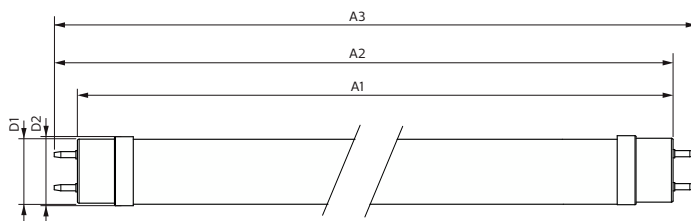


Product	D1	D2	A1	A2	A3
MAS LEDtube VLE 1200mm UO 15.5W 865 T8	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm

MASTER Value LED tube EM/Mains T8


Photometric data

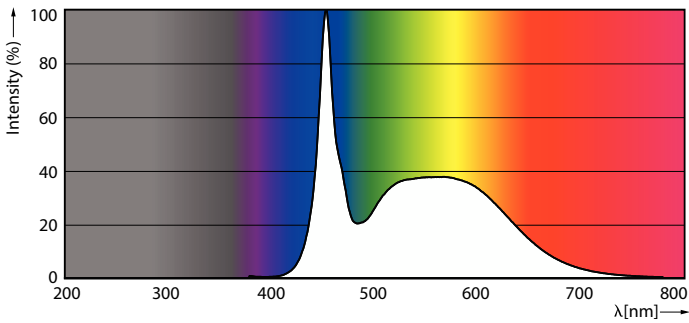

Spectral Power Distribution Colour - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

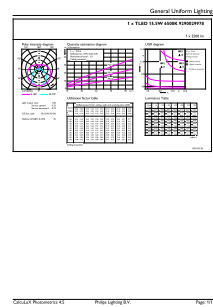


General uniform lighting - MAS LEDtube VLE 1200mm UO 15.5W 865 T8




Light Distribution Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

Lifetime

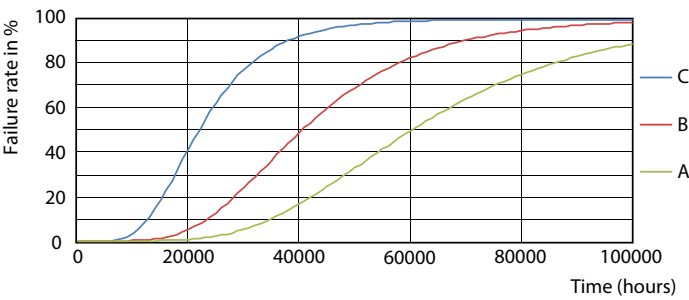



FailureRate

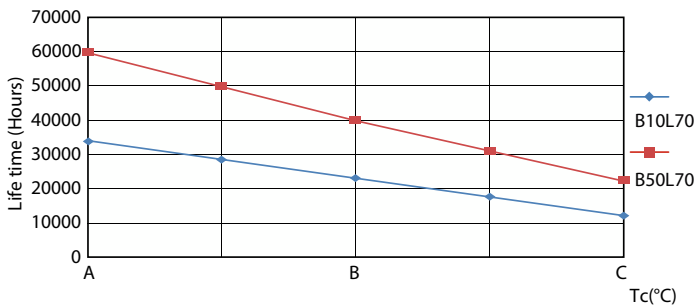

LifetimeVsTc


MASTER Value LED tube EM/Mains T8

Lifetime

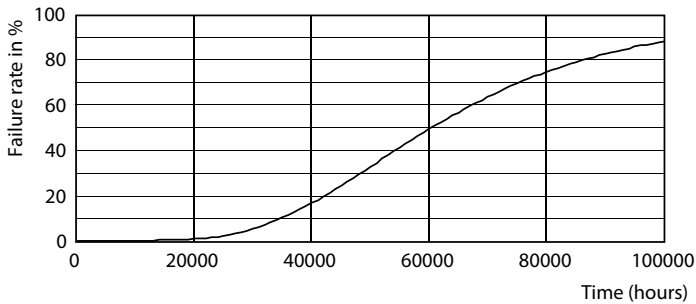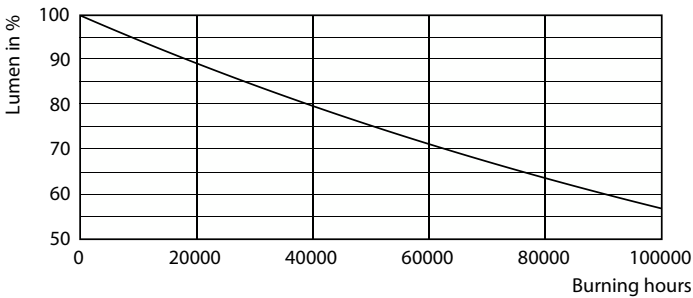

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

Life Expectancy Diagram

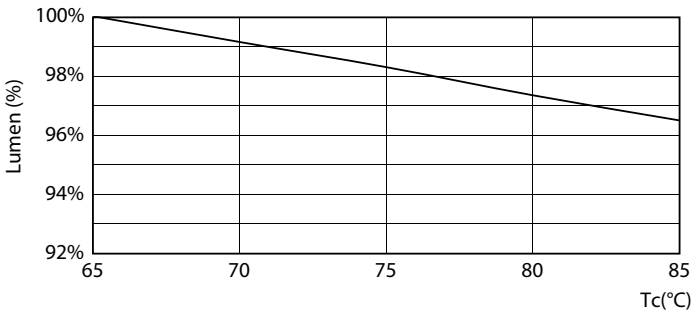

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

