

MASTER Value LED tube EM/Mains T8



MAS LEDtube VLE 1500mm UO 23W 830 T8

MASTER Value, LEDtube, T8, EM/Mains, 1500 mm, 220-240 V, 23 W, 58W TL-D, 3000 K, 3400 lm, CRI 80, 60000 hour(s)

MASTER Value, LEDtube, T8, EM/Mains, 1500 mm, 220-240 V, 23 W, LED alternative to 58W TL-D, 3000 K, 3400 lm, CRI 80, 60000 hour(s), 147.00 lm/W, EEL D, G13, Beam angle 190 degree(s), Glass, 1500 mm, RG0, SDCM 6, PF 0.9, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	G13
Nominal lifetime	60,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	190 degree(s)
Luminous Flux	3,400 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	147.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	23 W
Lamp Current (Max)	108 mA
Lamp Current (Min)	99 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	58W TL-D
Inrush current at mains	8.2
Max. lamp no. on MCB B type 10A - Mains	65
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	65

MASTER Value LED tube EM/Mains T8

Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	10
Max. lamp no. on MCB B type 16A – Mains	100
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	100
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	16
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	65 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T8
Net Weight (Piece)	0.270 kg

Approval and Application

Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate

Energy Consumption kWh/1000 h	23 kWh
EPREL Registration Number	1095874
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 45 °C


Application Conditions

Wireless Technology	Not applicable
---------------------	----------------

Product Data

Order product name	MAS LEDtube VLE 1500mm UO 23W 830 T8
Full product name	MAS LEDtube VLE 1500mm UO 23W 830 T8
Full product code	871951431686700
Order code	929002997902
Material Nr. (12NC)	929002997902
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8719514316867
Numerator – Packs per outer box	10
EAN/UPC – Case	8719514316874


Dimensional drawing

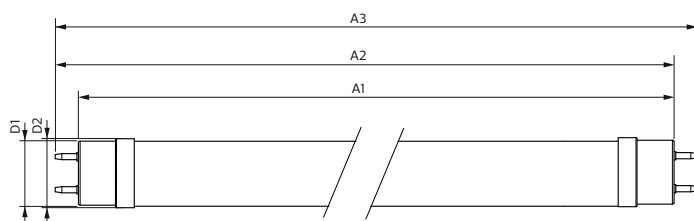


Product	D1	D2	A1	A2	A3
MAS LEDtube VLE 1500mm UO 23W 830 T8	25.8 mm	28 mm	1,498.8 mm	1,505.9 mm	1,513 mm

MASTER Value LED tube EM/Mains T8


Photometric data

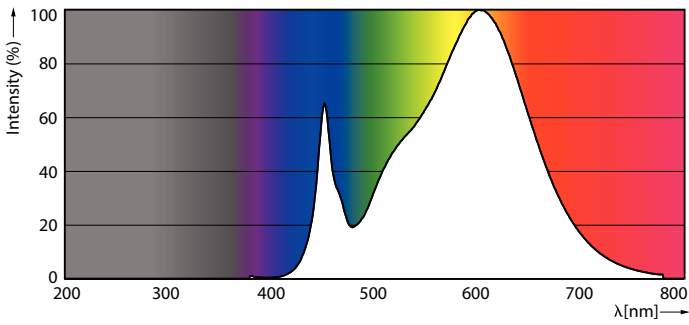

Spectral Power Distribution Colour - MAS LEDtube VLE 1500mm UO 23W 830 T8




Light Distribution Diagram - MAS LEDtube VLE 1500mm UO 23W 830 T8




General uniform lighting - MAS LEDtube VLE 1500mm UO 23W 830 T8

Lifetime

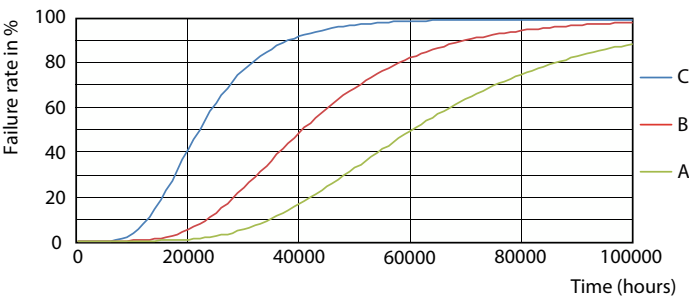


FailureRate

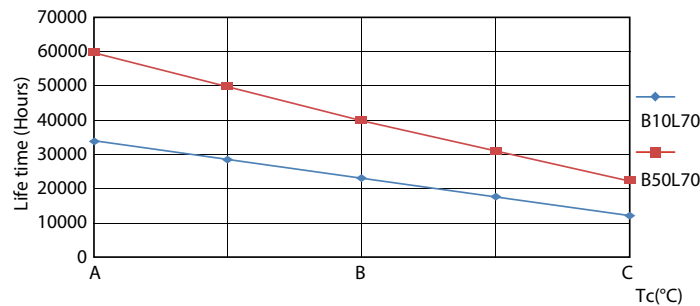


LifetimeVsTc

MASTER Value LED tube EM/Mains T8


Lifetime

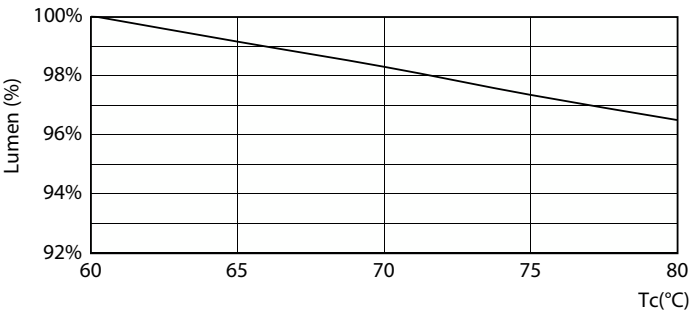

Lumen Maintenance Diagram - MAS LEDtube VLE 1500mm UO 23W 830 T8

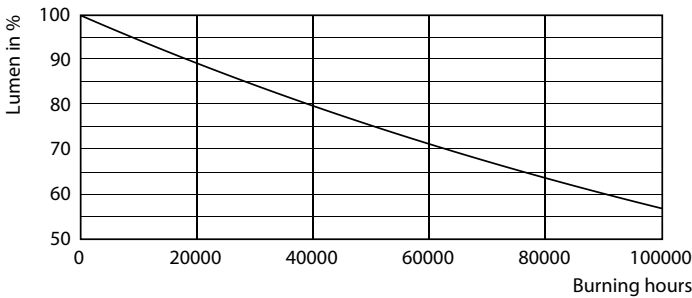

Lumen Maintenance Diagram - MAS LEDtube VLE 1500mm UO 23W 830 T8

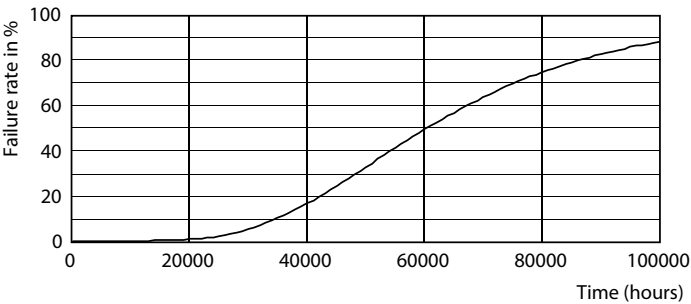

Life Expectancy Diagram

