



MASTER LED tube InstantFit HF T8



MAS LEDtube HF 1500mm UO 24W865 T8

MASTER, LEDtube, T8, HF, 1500 mm, 24 W, 58W TL-D, 6500 K, 3700 lm, CRI 80, 75000 hour(s)

MASTER, LEDtube, T8, HF, 1500 mm, 24 W, LED alternative to 58W TL-D, 6500 K, 3700 lm, CRI 80, 75000 hour(s), 154 lm/W, EEL D, G13 Rotatable end-cap, Beam angle 160 degree(s), Plastic, 1500 mm, RGO, SDCM 6, PF 0.9, IP20, SVM 0.2, PstLM 0.5

Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.

Product data

General Information	
Cap-Base	G13 Rotatable end-cap
Nominal lifetime	75,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Warranty period	5 years
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	3,700 lm
Color Designation	Cool Daylight

Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	154 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	20000-75000 Hz
Input Frequency	20000-75000 Hz
Power Consumption	24 W
Lamp Current (Max)	750 mA
Lamp Current (Min)	300 mA

MASTER LED tube InstantFit HF T8

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	30-80 V
LED alternative to fluorescent lamp power	58W TL-D
Inrush current at mains	-
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	-
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	-
Ballast Compatibility	HF

Temperature

T-Case Maximum (Nom)	55 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes - Check ballast compatibility
----------	-----------------------------------

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1,500 mm
Bulb Shape	T8
Net Weight (Piece)	0.280 kg

Approval and Application

Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate ENEC certificate
Energy Consumption kWh/1000 h	24 kWh
EPREL Registration Number	1165516
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.5
Stroboscopic effect visibility measure (SVM)	0.2
Ambient temperature range	-20 °C to 45 °C


Application Conditions

Wireless Technology	Not applicable
---------------------	----------------

Product Data

Order product name	MAS LEDtube HF 1500mm UO 24W865 T8
Full product name	MAS LEDtube HF 1500mm UO 24W865 T8
Full product code	871951446704000
Order code	929003554502
Material Nr. (12NC)	929003554502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514467040
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514467057


Dimensional drawing

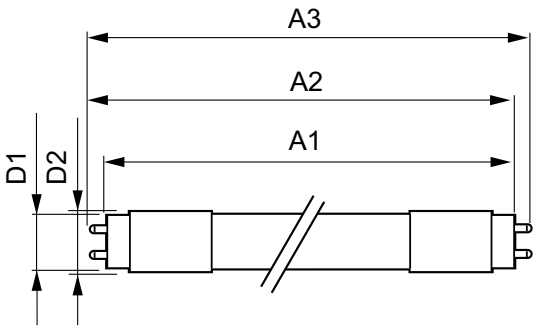


Product	D1	D2	A1	A2	A3
MAS LEDtube HF 1500mm UO 24W865 T8	25.8 mm	28 mm	1,498.8 mm	1,505.9 mm	1,513 mm

MASTER LED tube InstantFit HF T8


Photometric data



General uniform lighting - MAS LEDtube HF 1500mm UO 24W865 T8

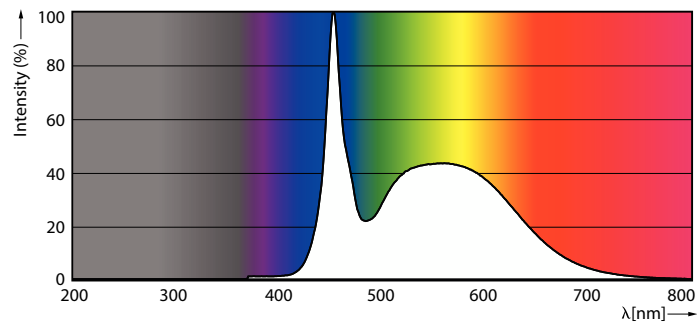


Spectral Power Distribution Colour - MAS LEDtube HF 1500mm UO 24W865 T8




Light Distribution Diagram - MAS LEDtube HF 1500mm UO 24W865 T8

Lifetime

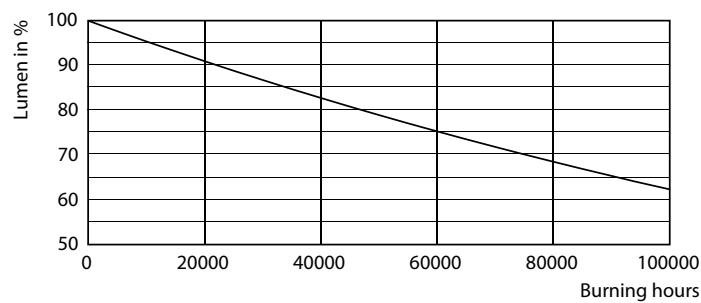



Lumen Maintenance Diagram - MAS LEDtube HF 1500mm UO 24W865 T8

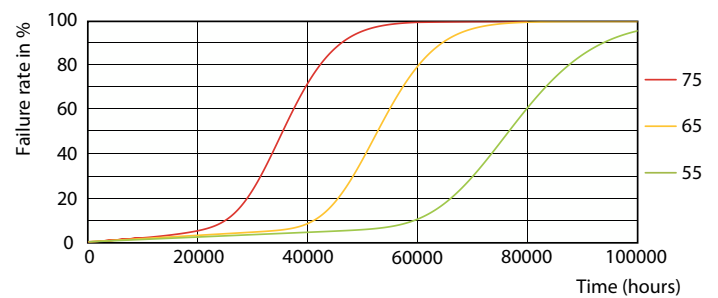

LEDtube-75K-5575-FailureRate-LED


MASTER LED tube InstantFit HF T8

Lifetime

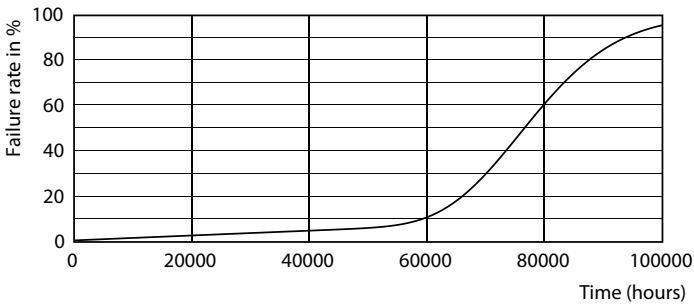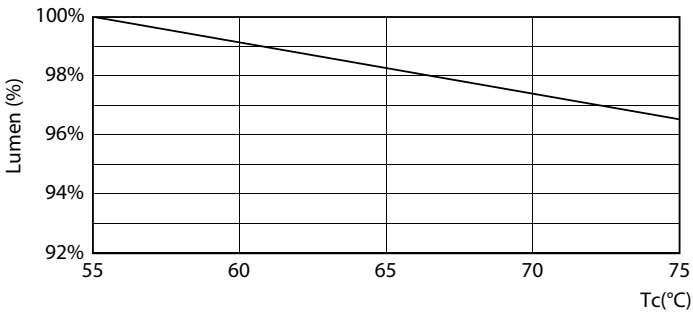

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm UO 24W865 T8

Life Expectancy Diagram

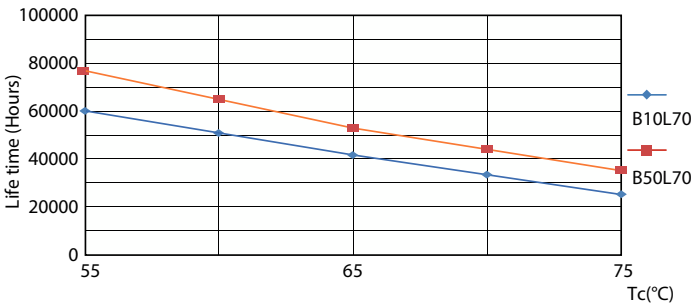

LifetimeVsTc

