



CorePro LED PLT 4P



CorePro LED PLT HF 6.5W 840 4P GX24q-2

CorePro, LED, PL-T, HF, 103 mm, 6.5 W, 18W PL-T, 4000 K, 800 lm, CRI 82, 30000 hour(s)

CorePro, LED, PL-T, HF, 103 mm, 6.5 W, LED alternative to 18W PL-T, 4000 K, 800 lm, CRI 82, 30000 hour(s), 123 lm/W, EEL E, GX24Q-2 Rotatable end-cap, Beam angle 120 degree(s), Plastic, RG1, SDCM 6, PF 0.9, IP20

Product data

General Information	
Cap-Base	GX24Q-2 Rotatable end-cap
Nominal lifetime	30,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
Warranty period	3 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	800 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	123 lm/W
Color Consistency	<6
Color rendering index (CRI)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1


Operating and Electrical	
Line Frequency	20K-80K Hz
Input Frequency	20K-80K Hz
Power Consumption	6.5 W
Lamp Current (Max)	300 mA
Lamp Current (Min)	150 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	20-60 V
LED alternative to fluorescent lamp power	18W PL-T
Inrush current at mains	-
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	-
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-

CorePro LED PLT 4P

Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	HF
Temperature	
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	103 mm
Bulb Shape	PL-T
Net Weight (Piece)	0.115 kg
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	7 kWh

EPREL Registration Number	1361421
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-20 °C to 35 °C
Application Conditions	
Wireless Technology	Not applicable
Product Data	
Order product name	CorePro LED PLT HF 6.5W 840 4P GX24q-2
Full product name	CorePro LED PLT HF 6.5W 840 4P GX24q-2
Full product code	871951448778900
Order code	929003576402
Material Nr. (12NC)	929003576402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514487789
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514487796


Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LED PLT HF 6.5W 840 4P GX24q-2	42 mm	42 mm	93 mm	103 mm	119 mm

CorePro LED PLT 4P


Photometric data



Light Distribution Diagram - CorePro LED PLT HF 6.5W 840 4P GX24q-2

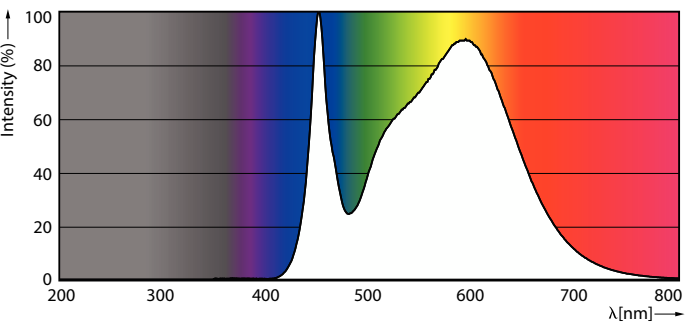


Spectral Power Distribution Colour - CorePro LED PLT HF 6.5W 840 4P GX24q-2




General uniform lighting - CorePro LED PLT HF 6.5W 840 4P GX24q-2

General uniform lighting - CorePro LED PLT HF 6.5W 840 4P GX24q-2

Lifetime

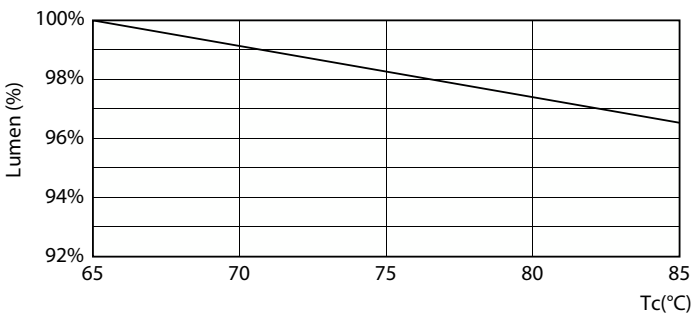



Lumen Maintenance Diagram - CorePro LED PLT HF 6.5W 840 4P GX24q-2

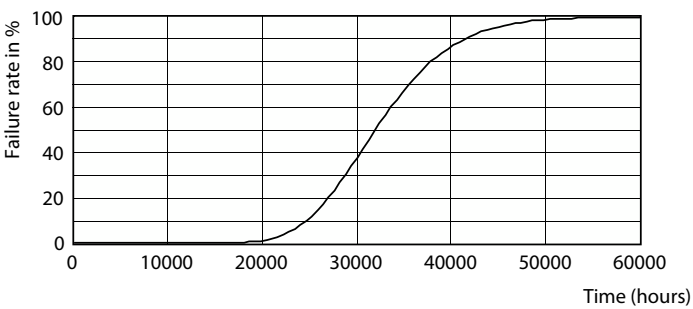

Life Expectancy Diagram

CorePro LED PLT 4P

Lifetime

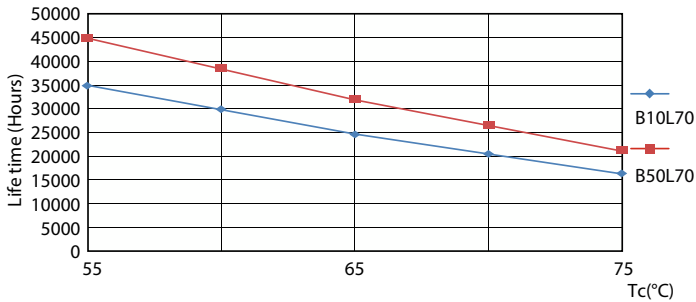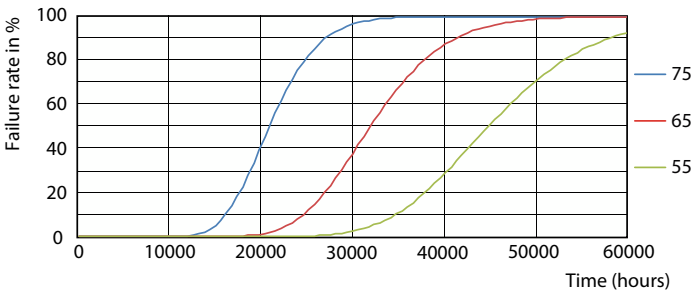

FailureRate



LifetimeVsTc

Lumen Maintenance Diagram - CorePro LED PLT HF 6.5W 840 4P GX24q-2

