



MASTER LED tube Mains T5



MAS LEDtube 900mm HO 18.5W 865 T5

MASTER, LEDtube, T5, Mains, 900 mm, 18.5 W, 39W TL5 HO, 6500 K, 2800 lm, CRI 80, 60000 hour(s)

MASTER, LEDtube, T5, Mains, 900 mm, 18.5 W, LED alternative to 39W TL5 HO, 6500 K, 2800 lm, CRI 80, 60000 hour(s), 151 lm/W, EEL D, G5, Beam angle 200 degree(s), Glass, 900 mm, RGO, SDCM 6, PF 0.92, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	G5
Nominal lifetime	60,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Warranty period	5 years
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	200 degree(s)
Luminous Flux	2,800 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	151 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RGO
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	18.5 W
Lamp Current (Max)	93 mA
Lamp Current (Min)	93 mA
Lamp Current (Nom)	93 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.92
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	39W TL5 HO
Inrush current at mains	17
Max. lamp no. on MCB B type 10A - Mains	41
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-

MASTER LED tube Mains T5

Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	66
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	Mains

Temperature

T-Case Maximum (Nom)	60 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	900 mm
Bulb Shape	T5
Net Weight (Piece)	0.125 kg

Approval and Application

Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance

Energy Consumption kWh/1000 h	19 kWh
EPREL Registration Number	1590871
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions

Wireless Technology	Not applicable
---------------------	----------------

Product Data

Order product name	MAS LEDtube 900mm HO 18.5W 865 T5
Full product name	MAS LEDtube 900mm HO 18.5W 865 T5
Full product code	872016927529400
Order code	929003734802
Material Nr. (12NC)	929003734802
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8720169275294
Numerator – Packs per outer box	10
EAN/UPC – Case	8720169275300


Dimensional drawing

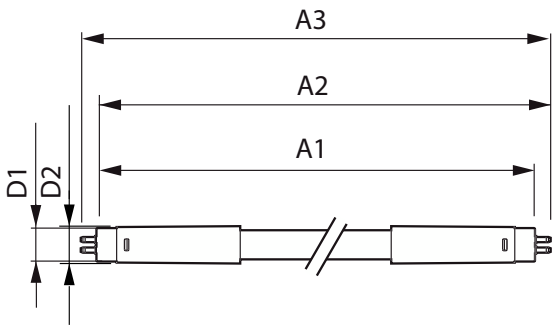


Product	D1	D2	A1	A2	A3
MAS LEDtube 900mm HO 18.5W 865 T5	19 mm	849 mm	856.1 mm	863.2 mm	

MASTER LED tube Mains T5


Photometric data



Light Distribution Diagram - MAS LEDtube 900mm HO 18.5W 865 T5




General uniform lighting - MAS LEDtube 900mm HO 18.5W 865 T5

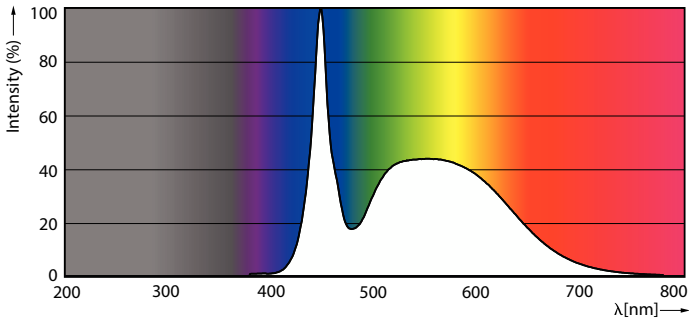


Spectral Power Distribution Colour - MAS LEDtube 900mm HO 18.5W 865 T5

Lifetime

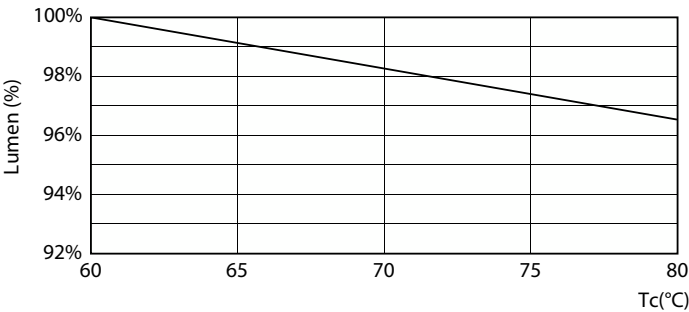

Lumen Maintenance Diagram - MAS LEDtube 900mm HO 18.5W 865 T5

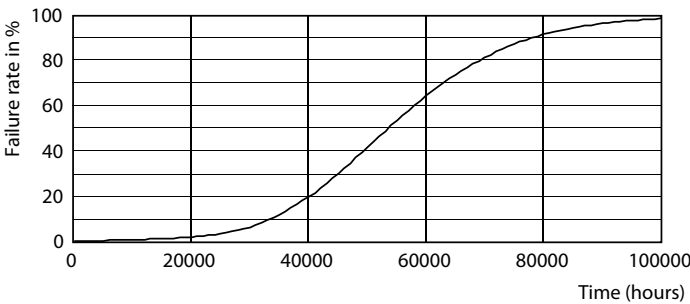


Life Expectancy Diagram

MASTER LED tube Mains T5

Lifetime



LifetimeVsTc

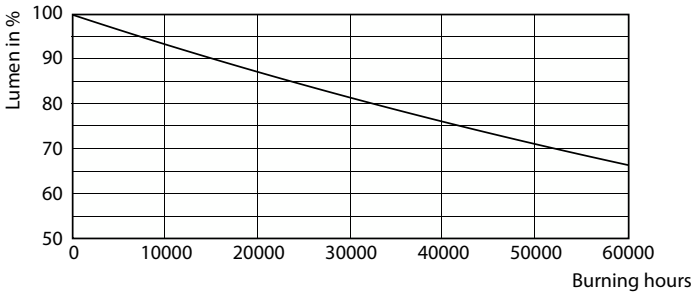

FailureRate

Lumen Maintenance Diagram - MAS LEDtube 900mm HO 18.5W 865 T5

