

CorePro LED tube EM/ Mains T8



CorePro LEDtube 1500mm UO 25.9W 840 T8

CorePro, LEDtube, T8, EM/Mains, 1500 mm, 25.9 W, 58W TL-D, 4000 K, 3500 lm, CRI 80, 50000 hour(s)

CorePro, LEDtube, T8, EM/Mains, 1500 mm, 25.9 W, LED alternative to 58W TL-D, 4000 K, 3500 lm, CRI 80, 50000 hour(s), 135 lm/W, EEL D, G13, Beam angle 240 degree(s), Glass, 1500 mm, RG0, SDCM 6, PF 0.9, IP20, SVM 0.4, PstLM 1

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

Product data

General Information	
Cap-Base	G13
Nominal lifetime	50,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LEDtube
Flux measurement reference	Sphere
Warranty period	3 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	3,500 lm

Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	135 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	25.9 W
Lamp Current (Nom)	130 mA

CorePro LED tube EM/Mains T8

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	58W TL-D
Inrush current at mains	6.6
Max. lamp no. on MCB B type 10A - Mains	62
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	62
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	18
Max. lamp no. on MCB B type 16A - Mains	98
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	98
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	28
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	55 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T8
Net Weight (Piece)	0.270 kg

Approval and Application

Energy Efficiency Class	D
-------------------------	---

Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	1827719
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable

Product Data

Order product name	CorePro LEDtube 1500mm UO 25.9W 840 T8
Full product name	CorePro LEDtube 1500mm UO 25.9W 840 T8
Full product code	872016927866000
Order code	929003746502
Material Nr. (12NC)	929003746502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169278660
Numerator - Packs per outer box	20
EAN/UPC - Case	8720169278677


Dimensional drawing

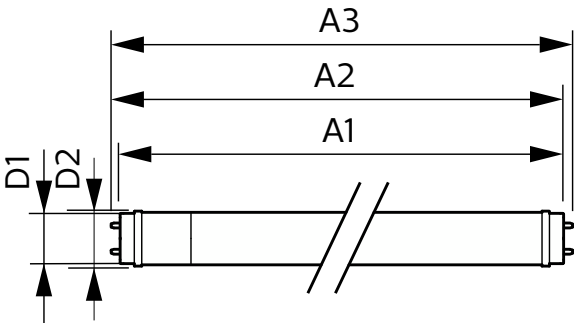


Product	D1	D2	A1	A2	A3
CorePro LEDtube 1500mm UO 25.9W 840 T8	25.7 mm	28 mm	1,500 mm	1,507.1 mm	1,514.2 mm

CorePro LED tube EM/Mains T8


Photometric data

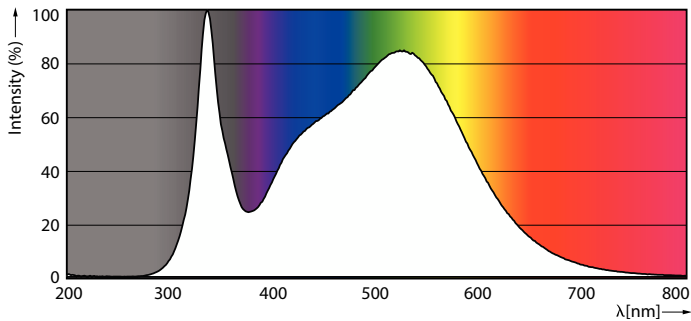

Spectral Power Distribution Colour - CorePro LEDtube 1500mm UO 25.9W 840 T8




General uniform lighting - CorePro LEDtube 1500mm UO 25.9W 840 T8




Light Distribution Diagram - CorePro LEDtube 1500mm UO 25.9W 840 T8

Lifetime

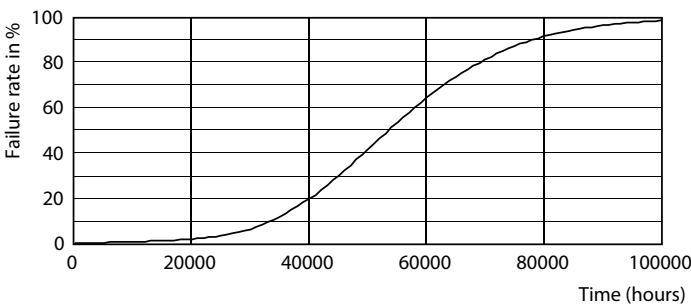


Life Expectancy Diagram

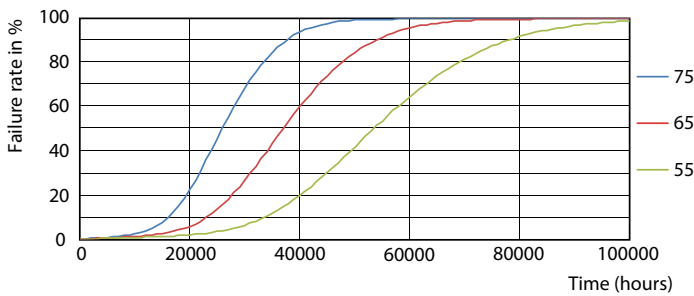


FailureRate

CorePro LED tube EM/Mains T8

Lifetime

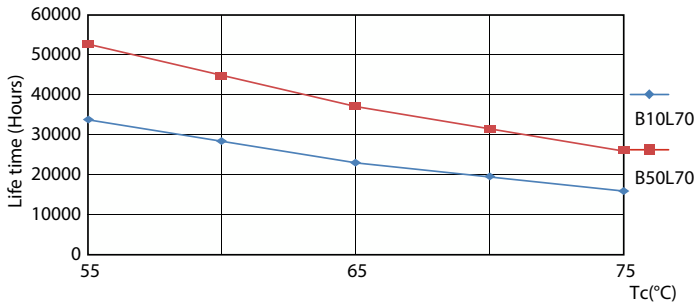

Lumen Maintenance Diagram - CorePro LEDtube 1500mm UO 25.9W 840 T8

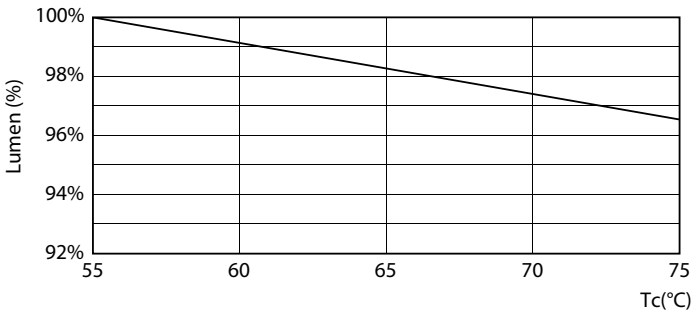

LifetimeVsTc

Lumen Maintenance Diagram - CorePro LEDtube 1500mm UO 25.9W 840 T8

