



MASTER VALUE LED spot MV

MAS LED spot VLE D 2.8-35W GU10 940 36D

MASTER Value, LED, PAR16, 35 W, GU10, 4000 K, 285 lm, CRI 90, 25000 hour(s), Glass

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

| General Information | | Warranty period | |
|----------------------------|----------------|--------------------------|--------------------|
| Cap-Base | GU10 | 5 years | |
| Nominal lifetime | 25,000 hour(s) | Light Technical | |
| Switching Cycle | 50,000 | Color Code | 940 [CCT of 4000K] |
| Lighting Technology | LED | Beam Angle (Nom) | 36 degree(s) |
| Flux measurement reference | Narrow Cone | Luminous Flux | 285 lm |
| | | Luminous Intensity (Nom) | 600 cd |

MASTER VALUE LED spot MV

| | |
|--|-----------------|
| Color Designation | Cool White (CW) |
| Correlated Color Temperature (Nom) | 4000 K |
| Luminous Efficacy (rated) (Nom) | 101 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Luminous Flux in 90° Cone (Rated) | 285 lm |
| Photobiological safety according to EN 62471 | RG1 |

Operating and Electrical

| | |
|---------------------------|-------------|
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 2.8 W |
| Lamp Current (Nom) | 21 mA |
| Wattage Equivalent | 35 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.55 |
| Voltage (Nom) | 220-240 V |

Temperature

| | |
|----------------------|-------|
| T-Case Maximum (Nom) | 50 °C |
|----------------------|-------|

Controls and Dimming

| | |
|----------|----------------------------|
| Dimmable | Only with specific dimmers |
|----------|----------------------------|

Mechanical and Housing

| | |
|--------------------|----------|
| Bulb Finish | Clear |
| Bulb Material | Glass |
| Bulb Shape | PAR16 |
| Net Weight (Piece) | 0.041 kg |

Approval and Application

| | |
|---|---------------|
| Energy Efficiency Class | E |
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | 3 kWh |
| EPREL Registration Number | 2150473 |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| Flickering value (PstLM) - Flickering value as per EN 61000-3-3 | 1 |
| Stroboscopic effect visibility measure (SVM) | 0.4 |
| Ambient temperature range | -20 to +45 °C |


Application Conditions

| | |
|-------------------------------------|----|
| can it be used in closed luminaires | No |
|-------------------------------------|----|

Product Data

| | |
|---------------------------------|---|
| Order product name | MAS LED spot VLE D 2.8-35W GU10 940 36D |
| Full product name | MAS LED spot VLE D 2.8-35W GU10 940 36D |
| Full product code | 872016939930300 |
| Order code | 929004247502 |
| Material Nr. (12NC) | 929004247502 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169399303 |
| Numerator - Packs per outer box | 10 |
| EAN/UPC - Case | 8720169399310 |



Dimensional drawing



| Product | D | C |
|---|-------|-------|
| MAS LED spot VLE D 2.8-35W GU10 940 36D | 50 mm | 54 mm |


MASTER VALUE LED spot MV

Photometric data



Light Distribution Diagram - MAS LED spot VLE D 2.8-35W GU10 940 36D

Accent Lighting Spots - MAS LED spot VLE D 2.8-35W GU10 940 36D

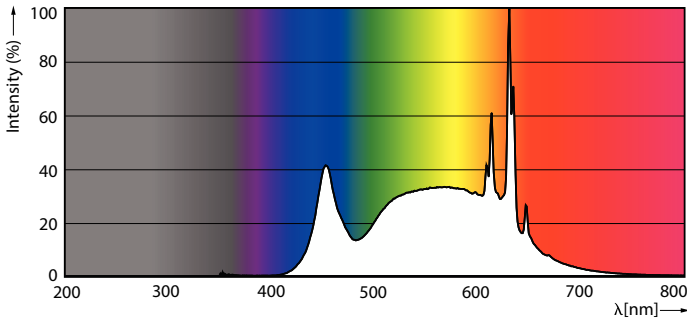

Spectral Power Distribution Colour - MAS LED spot VLE D 2.8-35W GU10 940 36D

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - MAS LED spot VLE D 2.8-35W GU10 940 36D

MASTER VALUE LED spot MV

