



MASTER Value Glass LED bulbs



MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG

MASTER Value, LEDbulb, A60, 75 W, E27, 2700 K, 1055 lm, CRI 90, 15000 hour(s), Glass

MASTER Value, LEDbulb, A60, 75 W, E27, 2700 K, 1055 lm, CRI 90, 15000 hour(s), Glass, 135.00 lm/W, EEL D, PF 0.7, Beam angle 300 degree(s), RG0, IP65, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LEDbulb
Flux measurement reference	Sphere
Warranty period	2.5 years
Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	1,055 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	135.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %


Photobiological safety according to EN 62471		RG0
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	7.8 W	
Lamp Current (Nom)	46 mA	
Wattage Equivalent	75 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.7	
Voltage (Nom)	220–240 V	
Temperature		
T-Case Maximum (Nom)	80 °C	

MASTER Value Glass LED bulbs

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	A60
Net Weight (Piece)	0.030 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	574363
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions	
can it be used in closed luminaires	No
Wireless Technology	Not applicable
Product Data	
Order product name	MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG
Full product name	MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG
Full product code	871951434788500
Order code	929003057902
Material Nr. (12NC)	929003057902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514347885
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514347892

Dimensional drawing




Product	D	C
MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG	60 mm	104 mm

Photometric data




Light Distribution Diagram - MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG



General uniform lighting - MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG

MASTER Value Glass LED bulbs

Photometric data

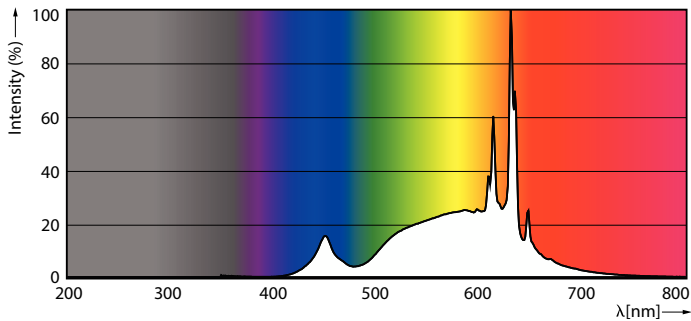

Spectral Power Distribution Colour - MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - MAS VLE LEDBulb D7.8-75W E27 927 A60 CLG

