



CorePro LEDcapsule MV



CorePro LEDcapsuleMV 4-40W G9 827 D

The LED specialties deliver a high quality light to make themselves to be a true replacement of halogen specialty lamp (such as G9 and R7S). It is particularly suit for task lighting in hotel and restaurants, and ideal for decorative and ambient application. LEDspecialty products deliver huge energy saving and minimize maintenance costs, without any compromise on light quality.

Product data

General Information	
Cap-Base	G9
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	320 degree(s)
Luminous Flux	480 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	120 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	4 W
Lamp Current (Nom)	24 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	93 ℃
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Bulb Shape	G9


Datasheet, 2025, January 24 data subject to change

CorePro LEDcapsule MV

Net Weight (Piece)	0.011 kg	
Approval and Application		
Energy Efficiency Class	E	
Suitable For Accent Lighting	No	
Energy Consumption kWh/1000 h	4 kWh	
EPREL Registration Number	1932585	
EU RoHS compliant	Yes	
EyeComfort	Yes	
Flickering value (PstLM) - Flickering value as per 1		
EN 61000-3-3		
Stroboscopic effect visibility measure (SVM)	0.4	
Ambient temperature range	-20 to +45 °C	
Application Conditions		
can it be used in closed luminaires	No	


Product Data	
Order product name	CorePro LEDcapsuleMV 4-40W G9
	827 D
Full product name	CorePro LEDcapsuleMV 4-40W G9
	827 D
Full product code	872016930177100
Order code	929003791202
Material Nr. (12NC)	929003791202
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169301771
Numerator - Packs per outer box	12
EAN/UPC - Case	8720169301788


Dimensional drawing



Product	D	С
CorePro LEDcapsuleMV 4-40W G9 827 D	18 mm	59 mm

Photometric data

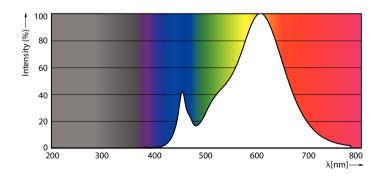




Spectral Power Distribution Colour - CorePro LEDcapsuleMV 4-40W G9 827 D

General uniform lighting - CorePro LEDcapsuleMV 4-40W G9 827 D


CorePro LEDcapsule MV


Photometric data



Light Distribution Diagram - CorePro LEDcapsuleMV 4-40W G9 827 D

Lifetime

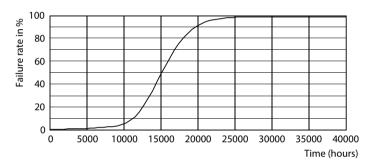

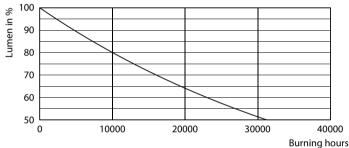

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDcapsuleMV 4-40W G9 827 D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.