



MASTER VALUE LED spot MV

MAS LED spot VLE D 2.8-35W GU10 930 36D

MASTER Value, LED, PAR16, 35 W, GU10, 3000 K, 270 lm, CRI 90, 25000 hour(s), Glass

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information		Warranty period	
Cap-Base	GU10	5 years	
Nominal lifetime	25,000 hour(s)	Light Technical	
Switching Cycle	50,000	Color Code	930 [CCT of 3000K]
Lighting Technology	LED	Beam Angle (Nom)	36 degree(s)
Flux measurement reference	Narrow Cone	Luminous Flux	270 lm
		Luminous Intensity (Nom)	600 cd

MASTER VALUE LED spot MV

Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	96 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	270 lm
Photobiological safety according to EN 62471	RG1

Operating and Electrical

Input Frequency	50 to 60 Hz
Power Consumption	2.8 W
Lamp Current (Nom)	21 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.55
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	PAR16
Net Weight (Piece)	0.041 kg

Approval and Application

Energy Efficiency Class	E
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	3 kWh
EPREL Registration Number	2150477
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

Product Data

Order product name	MAS LED spot VLE D 2.8-35W GU10 930 36D
Full product name	MAS LED spot VLE D 2.8-35W GU10 930 36D
Full product code	872016939928000
Order code	929004247402
Material Nr. (12NC)	929004247402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169399280
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169399297


Dimensional drawing




Product	D	C
MAS LED spot VLE D 2.8-35W GU10 930 36D	50 mm	54 mm

MASTER VALUE LED spot MV


Photometric data

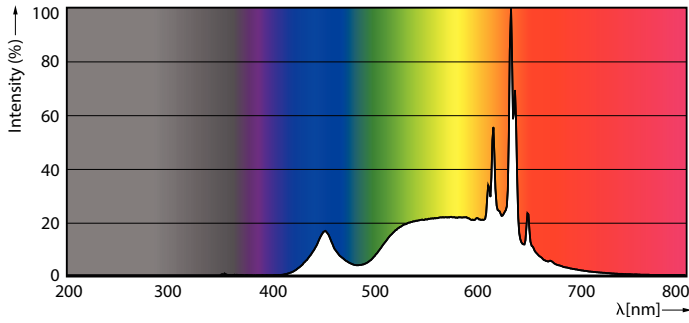

Spectral Power Distribution Colour - MAS LED spot VLE D 2.8-35W GU10 930 36D



Light Distribution Diagram - MAS LED spot VLE D 2.8-35W GU10 930 36D



Accent Lighting Spots - MAS LED spot VLE D 2.8-35W GU10 930 36D

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - MAS LED spot VLE D 2.8-35W GU10 930 36D

MASTER VALUE LED spot MV

